

UNIVERSAL TRANSMITTER



- Input for RTD, TC, Ohm, potentiometer, mA and V
- 2-wire supply > 16 V
- FM-approved for installation in Div. 2
- Output for current, voltage and 2 relays
- Universal AC or DC supply



Advanced features:

- Programmable via detachable display front (4501), process calibration, signal and relay simulation, password protection, error diagnostics and selection of help text in several languages.

Application:


- Linearised, electronic temperature measurement with RTD or TC sensor.
- Conversion of linear resistance variation to a standard analogue current / voltage signal, i.e. from solenoids and butterfly valves or linear movements with attached potentiometer.
- Power supply and signal isolator for 2-wire transmitters.
- Process control with 2 pairs of potential-free relay contacts and analogue output.
- Galvanic separation of analogue signals and measurement of floating signals.
- The 4116 is designed according to strict safety requirements and is thus suitable for application in SIL 2 installations.

Technical characteristics:


- When 4116 is used in combination with the 4501 display / programming front, all operational parameters can be modified to suit any application. As the 4116 is designed with electronic hardware switches, it is not necessary to open the module for setting of DIP switches.
- A green / red front LED indicates normal operation and malfunction. A yellow LED is ON for each active output relay.
- Continuous check of vital stored data for safety reasons.
- 4-port 2.3 kVAC galvanic isolation.

Applications


Input signals:

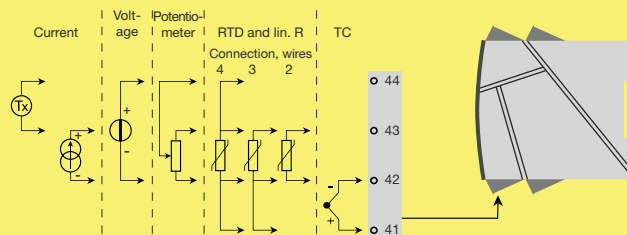

Output signals:

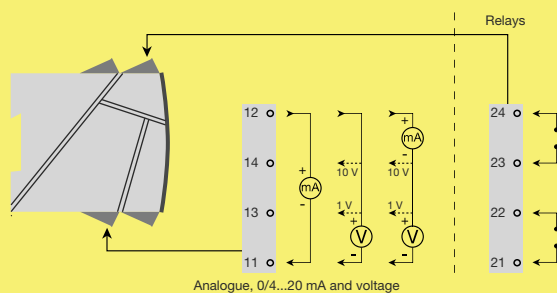

Supply:

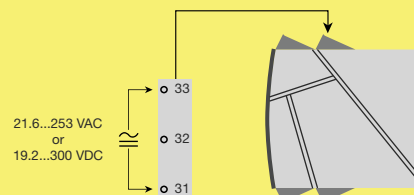

Order codes:

4116 = Universal transmitter

4501 = Display / programming front

PR 4501 Display / programming front



Application:

- Communications interface for modification of operational parameters in 4116.
- Can be moved from one 4116 module to another and download the configuration of the first transmitter to subsequent transmitters.
- Fixed display for visualisation of process data and status.

Technical characteristics:

- LCD display with 4 lines; Line 1

(H=5.57 mm) shows input signal, line 2 (H=3.33 mm) shows units, line 3 (H=3.33 mm) shows analogue output or TAG no. and line 4 shows communication and relay status.

- Programming access can be blocked by assigning a password. The password is saved in the transmitter in order to ensure a high degree of protection against unauthorised modifications to the configuration.

Mounting / installation:

- Click 4501 onto the front of 4116.

Electrical specifications:

Specifications range:

-20°C to +60°C

Common specifications:

Supply voltage, universal 21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
 Max. consumption..... ≤ 2.5 W
 Fuse..... 400 mA SB / 250 VAC
 Isolation voltage, test / operation..... 2.3 kVAC / 250 VAC
 Communications interface Programming front 4501
 Signal / noise ratio..... Min. 60 dB (0...100 kHz)
 Response time (0...90%, 100...10%):
 Temperature input ≤ 1 s
 mA / V input..... ≤ 400 ms
 Calibration temperature..... 20...28°C
 Accuracy, the greater of the general and basic values:

General values		
Input type	Absolute accuracy	Temperature coefficient
All	≤ ±0.1% of span	≤ ±0.01% of span / °C

Basic values		
Input type	Basic accuracy	Temperature coefficient
mA	≤ ±4 µA	≤ ±0.4 µA/°C
Volt	≤ ±20 µV	≤ ±2 µV/°C
RTD	≤ ±0.2°C	≤ ±0.01°C/°C
Lin. R	≤ ±0.1 Ω	≤ ±0.01 Ω/°C
Potentiometer	≤ ±0.1 Ω	≤ ±0.01 Ω/°C
TC type: E, J, K, L, N, T,	≤ ±1°C	≤ ±0.05°C/°C
TC type: B, R, S, W3, W5, LR	≤ ±2°C	≤ ±0.2°C/°C

EMC immunity influence	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

Auxiliary supplies:

2-wire supply (terminal 44...43) 25...16 VDC / 0...20 mA
 Max. wire size..... 1 x 2.5 mm² stranded wire
 Screw terminal torque 0.5 Nm
 Relative humidity < 95% RH (non-cond.)
 Dimen., without display front (HxBxD). 109 x 23.5 x 104 mm
 Dimensions, w. display front (HxBxD). 109 x 23.5 x 116 mm
 Tightness (enclosure / terminals)..... IP50 / IP20
 Weight 170 g / 185 g with 4501

RTD, linear resistance and potentiometer input:

Input type	Min. value	Max. value	Standard
Pt100	-200°C	+850°C	IEC60751
Ni100	-60°C	+250°C	DIN 43760
Lin. R	0 Ω	10000 Ω	-
Potentiometer	10 Ω	100 kΩ	-

Cable resistance per wire (max.), RTD . 50 Ω

Sensor current, RTD..... Nom. 0.2 mA

Effect of sensor cable resistance

(3- / 4-wire), RTD < 0.002 Ω / Ω
 Sensor error detection, RTD..... Yes
 Short circuit detection, RTD < 15 Ω

TC input:

Thermocouple type B, E, J, K, L, N, R, S, T, U, W3, W5, LR

Cold junction compensation (CJC):

via internally mounted sensor < ±1.0 °C
 Sensor error detection, all TC types.. Yes

Sensor error current:

when detecting..... Nom. 2 µA
 else 0 µA

Current input:

Measurement range -1...25 mA
 Programmable measurement ranges 0...20 and 4...20 mA
 Input resistance..... Nom. 20 Ω + PTC 50 Ω

Voltage input:

Measurement range -20 mV...12 VDC
 Programmable measurement ranges . 0/0.2...1; 0/1...5; 0/2...10 V
 Input resistance..... Nom. 10 MΩ

Current output:

Signal range (span)..... 0...20 mA
 Programmable signal ranges..... 0/4...20 and 20...4/0 mA
 Load (max.)..... 20 mA / 800 Ω / 16 VDC
 Load stability ≤ 0.01% of span / 100 Ω
 Sensor error detection..... 0 / 3.5 / 23 mA / none
 NAMUR NE 43 Upscale / Downscale 23 mA / 3.5 mA
 Current limit..... ≤ 28 mA

Voltage output:

Signal range 0...10 VDC
 Programmable signal ranges..... 0/0.2...1; 0/1...5; 0/2...10; 1...0.2/0; 5...1/0; 10...2/0 V
 Load (min.)..... 500 kΩ

Relay outputs:

Relay functions..... Setpoint, Window, Sensor error, Power and Off

Hysteresis, in % / display counts 0.1...25% / 1...2999
 On and Off delay 0...3600 s
 Max. voltage..... 250 VRMS
 Max. current 2 A / AC or 1 A / DC
 Max. AC power..... 500 VA
 Sensor error detection..... Break / Make / Hold

Ex / I.S. approval:

FM, applicable in Cl. I, Div. 2, Gr. A, B, C, D
 Class I, Div. 2, Group IIC
 Zone 2

Max. ambient temperature for T5..... 60°C

Marine approval:

Det Norske Veritas, Ships & Offshore. Stand. f. Certific. No. 2.4

Observed authority requirements: Standard:

EMC 2004/108/EC
 Emission and immunity EN 61326
 LVD 73/23/EEC..... EN 61010-1
 FM 3600, 3611, 3810 and
 ISA 82.02.01
 UL, Standard for Safety..... UL 508

of span = of the currently selected measurement range